

**TREE DEMOLITION NOTES**

TOTAL TREES TO BE REMOVED - (36) - CHINESE ELM TREES



ALL TREES ARE TO BE REMOVED AND CHIPPED ON SITE. WOOD CHIPS ARE TO BE USED TO MULCH PARKING LOT LANDSCAPE AREAS.

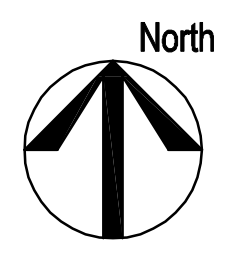
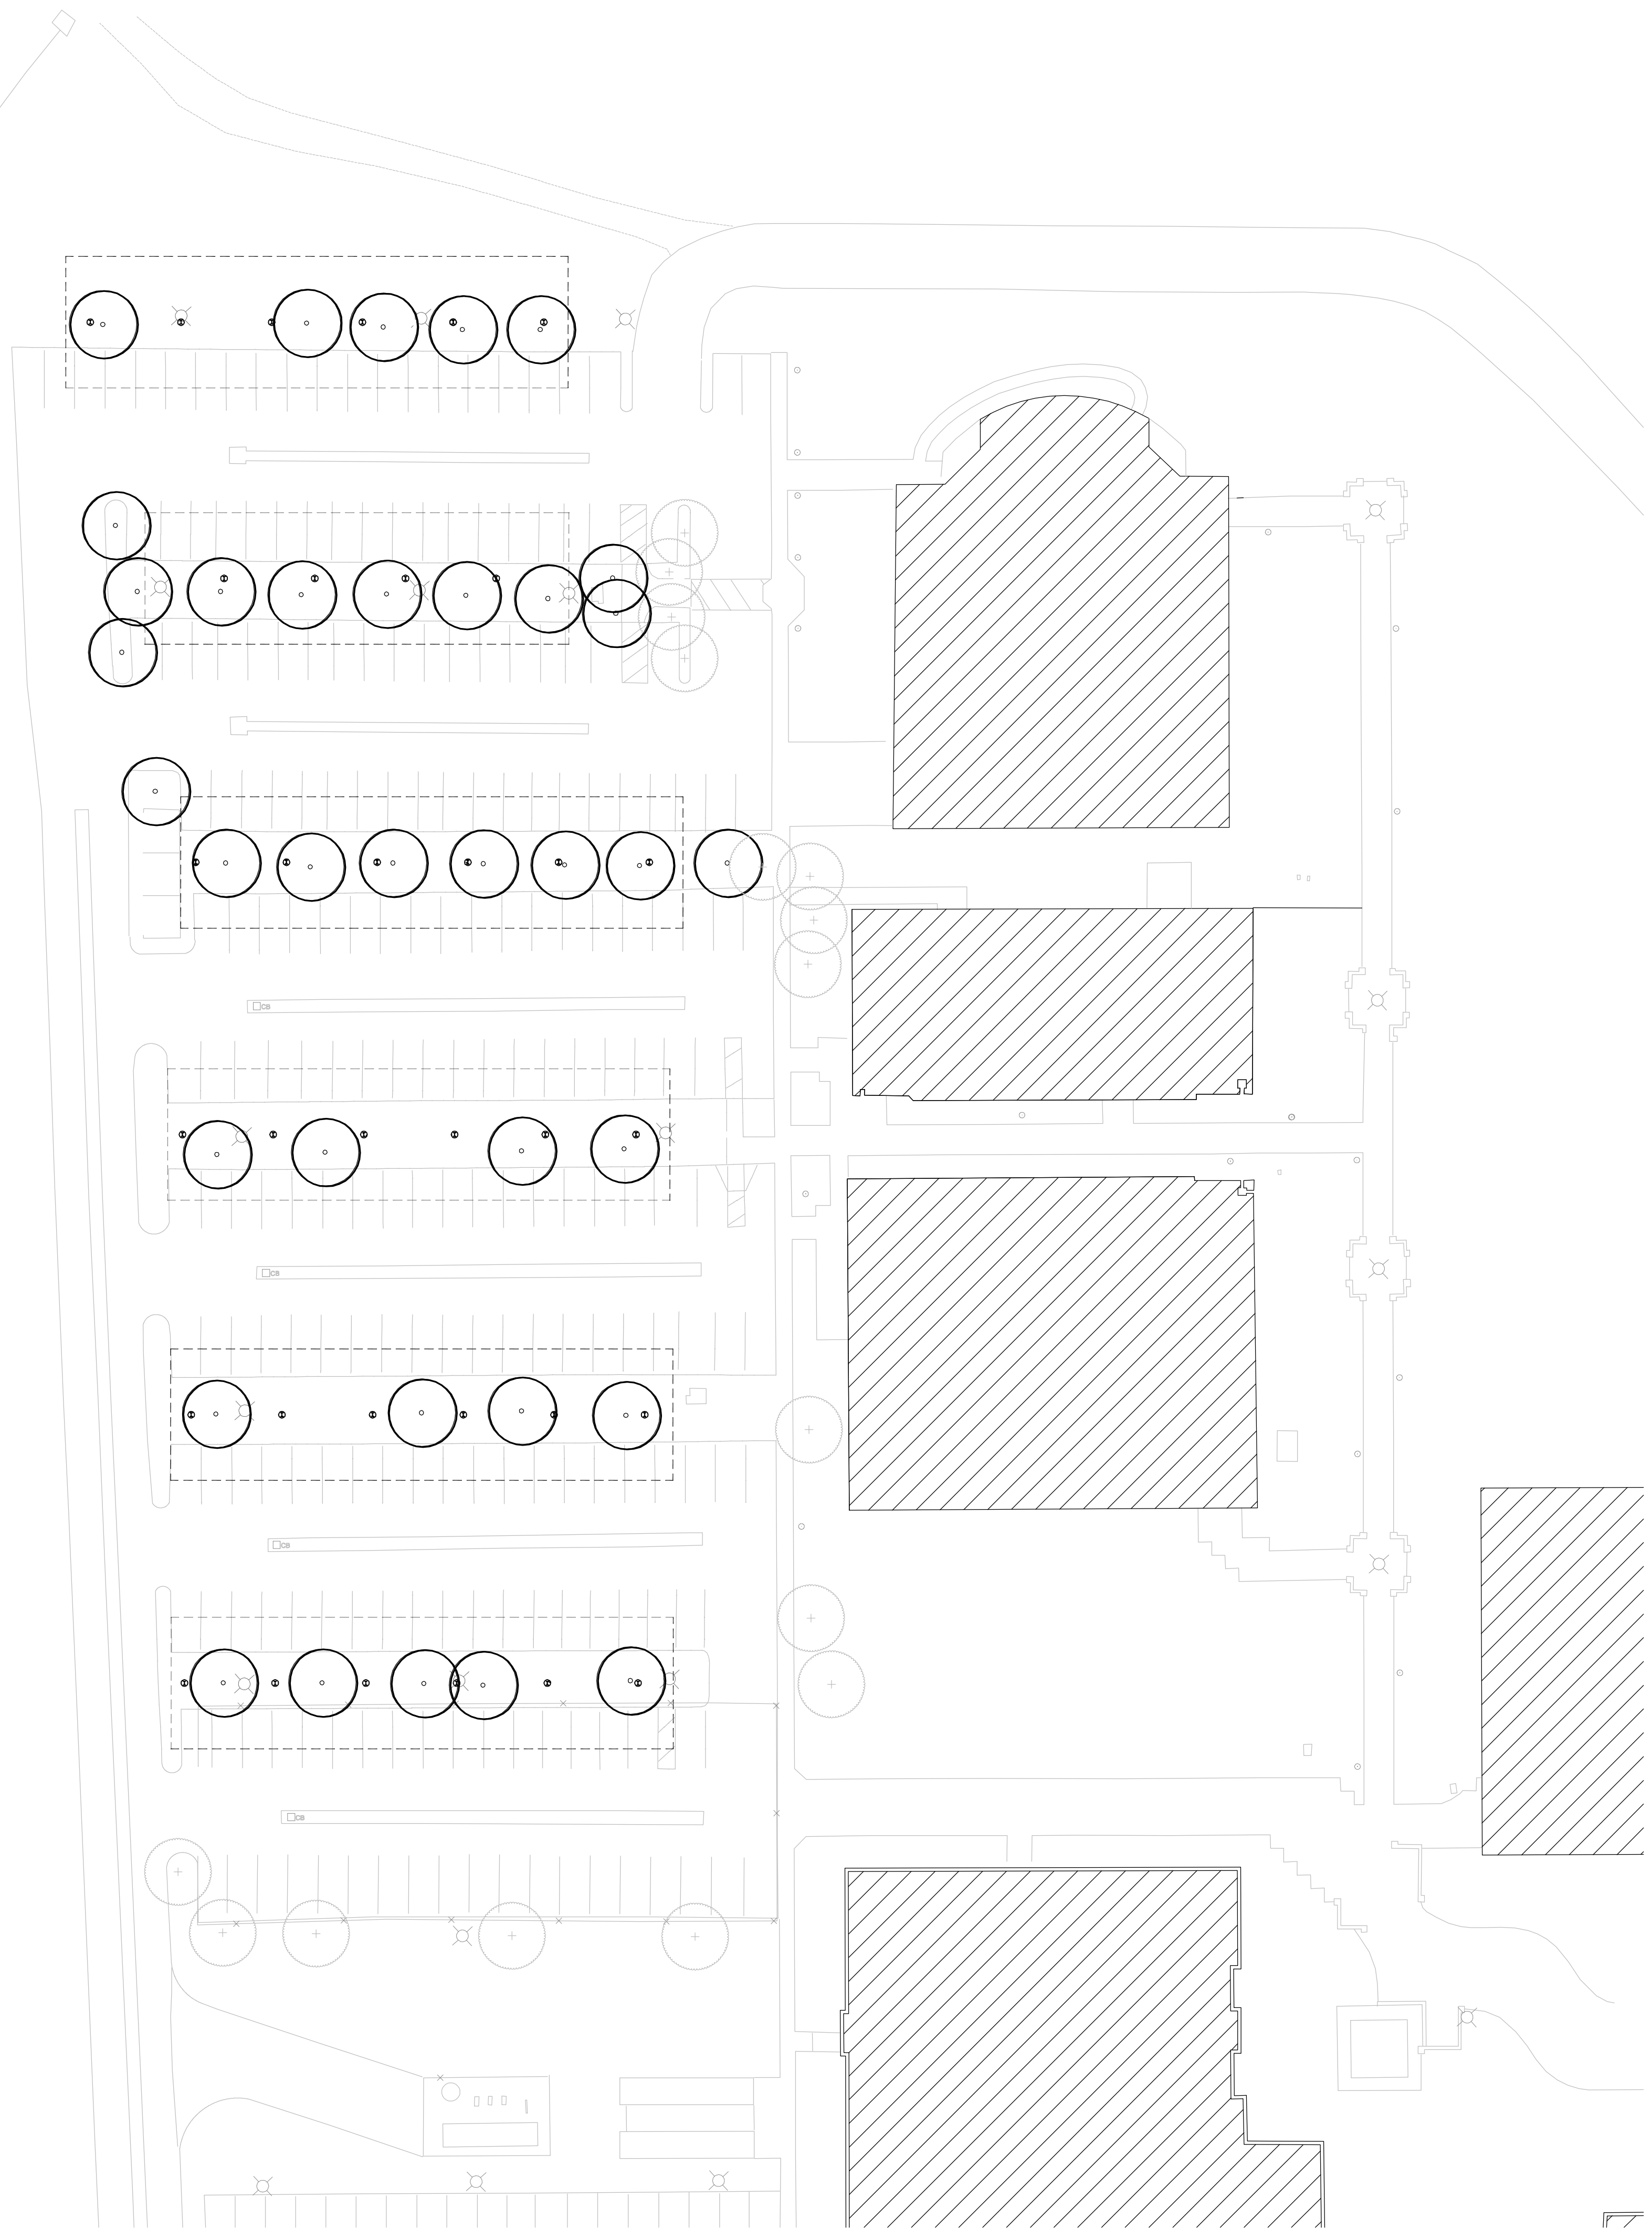
STUMPS OF ALL REMOVED TREES ARE TO BE GROUND TO A MINIMUM OF 6" BELOW ADJACENT SOIL GRADE.

ALL DAMAGE TO THE EXISTING IRRIGATION SYSTEM IS TO BE REPAIRED.

GROUND COVER PLANTS DAMAGED DURING DEMOLITION ARE TO BE PRUNED TO REMOVED BROKEN BRANCHES.

GROUND COVER PLANTS THAT ARE DESTROYED DURING DEMOLITION ARE TO BE REPLACED AFTER COMPLETION OF CANOPY CONSTRUCTION WITH A PLANT OF MATCHING SPECIES IN A 5 GALLON CONTAINER.

-  EXISTING TREE TO BE REMOVED
-  EXISTING TREE TO REMAIN, PROTECT IN PLACE



0' 15' 30' 60'  
 Scale: 1"=30'-0"

CN4901  
**MANTECA HOSPITAL**  
 1777 WEST YOSEMITE AVENUE  
 MANTECA, CALIFORNIA 95337

Revisions

Project Number  
 5554-100B0.10  
 Date  
 6.30.17  
 Drawn By  
 Checked By

Tree Demolition  
 Plan  
**L O 1**



KAISER PERMANENTE PV SOLAR PROJECT